




BD

FLOW CONTROL B-DIRECTIONAL


Edition. 21.1

CS Carbon Steel

- Type: reduce flow control
B-directional
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400
- Temp range: from -20°C
to +100°C



STANDARD COMPOSITION OF VALVE

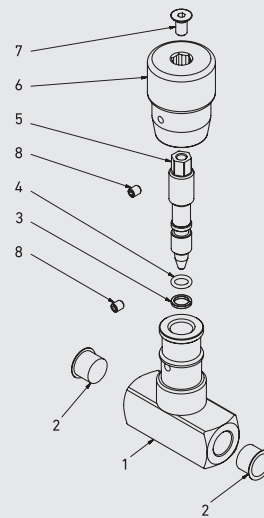

POS	DESCRIPTION	Q.TY	CS Carbon Steel	
			MATERIAL	
1	Body	1	1,0737	
2	Caps	2	PVC	
3	Stem	1	1,05	
4	Stem o-ring	1	NBR	
5	Stem ring	1	PTFE	
6	Handle	1	ALLUMINIUM	
7	Screw	1	DIN 7991 8.8	
8	Screw	1	DIN 7991 8.8	



CRACKING PRESSURE
0,50 bar


CODE DESCRIPTION STRUCTURE

	BD	G1/2	CS
Type and way of valve	BD flow control		
Ends			
GAS DIN/	NPT ANSI		
ISO 228	/ASME		
BSP	B1.20.1		
G 1/4	N 1/4		
G 3/8	N 3/8		
G 1/2	N 1/2		
G 3/4	N 3/4		
G 1	N 1		
G 1 1/4	N 1 1/4		
G 1 1/2	N 1 1/2		
Material	CS carbon steel		

*On request

- Special threads
- Pressure class PN 350

For further special requests please consult our technical/commercial service.

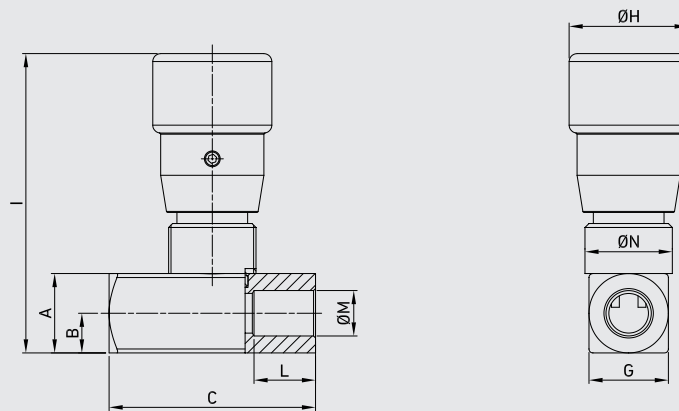

BD DIN/ISO 228 BSP

														CS Carbon Steel
TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE	A	B	C	G	ØH	I	ØM	ØN	WEIGHT	ITEM CODE
BD G 1/4	6	MPa 40	15	MPa 0,05	mm 25	12,5	54	25	30	75	G 1/4	M20X1	kg 0,33	GG2GGT130110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95			lb 0,73	
BD G 3/8	10	MPa 40	30	MPa 0,05	mm 25	12,5	54	25	30	75	G 3/8	M20X1	kg 0,31	GG2GGT230110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95			lb 0,68	
BD G 1/2	13	MPa 40	50	MPa 0,05	mm 30	15	64	30	33	81	G 1/2	M25X1.5	kg 0,48	GG2GGT330110000
		Psi 5800		Psi 7,25	inch 1,18	0,59	2,52	1,18	1,30	3,19			lb 1,06	
BD G 3/4	20	MPa 40	80	MPa 0,05	mm 40	20	81	40	42	110	G 3/4	M35X1.5	kg 1,13	GG2GGT430110000
		Psi 5800		Psi 7,25	inch 1,57	0,79	3,19	1,57	1,65	4,33			lb 2,49	
BD G 1	25	MPa 40	150	MPa 0,05	mm 45	22,5	102	45	42	115	G 1	M35X1.5	kg 1,5	GG2GGT530110000
		Psi 5800		Psi 7,25	inch 1,77	0,89	4,02	1,77	1,65	4,53			lb 3,31	
BD G 1 1/4	32	MPa 35	200	MPa 0,05	mm 55	27,5	102	55	53	137	G 1 1/4	M45X1.5	kg 2,37	GG2GGT630110000
		Psi 5075		Psi 7,25	inch 2,17	1,08	4,02	2,17	2,09	5,39			lb 5,22	
BD G 1 1/2	40	MPa 35	300	MPa 0,05	mm 65	32,5	102	65	53	147	G 1 1/2	M45X1.5	kg 3,17	GG2GGT730110000
		Psi 5075		Psi 7,25	inch 2,56	1,28	4,02	2,56	2,09	5,79			lb 6,99	

BD ANSI/ASME B1.20.1 NPT

CS

Carbon Steel

TYPE	DN	PN	MAX FLOW L/m	CRACKING PRESSURE	A	B	C	G	ØH	I	ØM	ØN	WEIGHT	ITEM CODE
BD N 1/4	6	MPa 40	15	MPa 0,05	mm 25	12,5	54	25	30	75	N 1/4	M20X1	kg 0,33	GG2NNT130110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95			lb 0,73	
BD N 3/8	10	MPa 40	30	MPa 0,05	mm 25	12,5	54	25	30	75	N 3/8	M20X1	kg 0,31	GG2NNT230110000
		Psi 5800		Psi 7,25	inch 0,98	0,49	2,13	0,98	1,18	2,95			lb 0,68	
BD N 1/2	13	MPa 40	50	MPa 0,05	mm 30	15	64	30	33	81	N 1/2	M25X1.5	kg 0,48	GG2NNT330110000
		Psi 5800		Psi 7,25	inch 1,18	0,59	2,52	1,18	1,30	3,19			lb 1,06	
BD N 3/4	20	MPa 40	80	MPa 0,05	mm 40	20	81	40	42	110	N 3/4	M35X1.5	kg 1,13	GG2NNT430110000
		Psi 5800		Psi 7,25	inch 1,57	0,79	3,19	1,57	1,65	4,33			lb 2,49	
BD N 1	25	MPa 40	150	MPa 0,05	mm 45	22,5	102	45	42	115	N 1	M35X1.5	kg 1,5	GG2NNT530110000
		Psi 5800		Psi 7,25	inch 1,77	0,89	4,02	1,77	1,65	4,53			lb 3,31	
BD N 1 1/4	32	MPa 35	200	MPa 0,05	mm 55	27,5	102	55	53	137	N 1 1/4	M45X1.5	kg 2,37	GG2NNT630110000
		Psi 5075		Psi 7,25	inch 2,17	1,08	4,02	2,17	2,09	5,39			lb 5,22	
BD N 1 1/2	40	MPa 35	300	MPa 0,05	mm 65	32,5	102	65	53	147	N 1 1/2	M45X1.5	kg 3,17	GG2NNT730110000
		Psi 5075		Psi 7,25	inch 2,56	1,28	4,02	2,56	2,09	5,79			lb 6,99	

PRESSURE DROP CURVES

