



Hypress EASY K 1SC

TFA201K

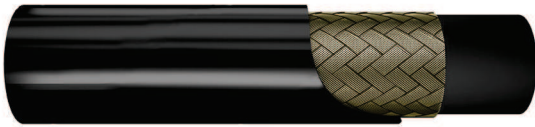

APPLICATIONS:



APPLICABLE SPECS.:

EN 857 1SC - ISO 11237

Compact hose according to EN 857 ISO 11237. NO-SKIVE solution. Smooth cover.

Internal hose: Synthetic rubber, extruded whole without joints, of uniform thickness.

Reinforcement: 1 high tensile steel wire braids.

Covering: Synthetic rubber resistant to oils, fuels and atmospheric conditions.

Recommended fluid: Mineral and biological oils, glycol-water based, water, lubricants.

Operating temperature: from -40 to +100°C, from -40 to +70° C for water based fluids, from 0 to +70°C water.

Part number	ID		Size	OD mm	Max WP		Min BP		Min BR		Weight		Ferrule
	in	mm			bar	psi	bar	psi	mm	inch	kg/m	lb/ft	
	TFA201K-04	1/4"			6.4	4	12.3	225	32625	900	23200	75	
TFA201K-05	5/16"	8.0	5	13.5	215	31175	860	20300	85	3.346	0.203	0.136	001C-05
TFA201K-06	3/8"	9.5	6	15.7	180	2610	720	19140	90	3.543	0.248	0.167	001C-06
TFA201K-08	1/2"	12.7	8	18.9	160	2320	640	15950	130	5.118	0.341	0.229	001C-08
TFA201K-10	5/8"	16.0	10	22.4	130	1885	520	14500	150	5.906	0.421	0.283	001C-10
TFA201K-12	3/4"	19.0	12	25.9	105	15225	420	12470	180	7.087	0.491	0.330	001C-12
TFA201K-16	1 "	25.4	16	33.7	88	1276	352	9570	230	9.055	0.740	0.499	001C-16

MARKING: Mylar version

Hypress **Easy K** EN 857 - 1SC DN 19 I.D. 3/4" - W.P. 105 BAR/3118 PSI