


# INTERPUMP LongLife Dual 1SC

## T2E101K



### APPLICATIONS:

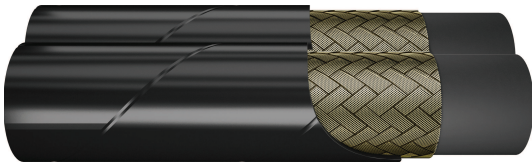

### APPLICABLE SPECIFICATIONS

exceed EN 857 - ISO 11237

No-SKIVE hose. High abrasion resistance. Pressure rating exceeding standards. Easy to install. SMOOTH COVER.

**Inner tube:** Synthetic rubber, extruded whole without joints, of uniform thickness.

**Reinforcement:** 1 or 2 high tensile steel wire braids.

**Coverage:** Smooth synthetic rubber, resistant to oils, fuels and atmospheric conditions.

**Recommended fluids:** Mineral and biological oils, glycol-water based, water, lubricants.

**working temperature:** from -40 to +120° C (Intermittent 135°C), from -40 to +70° C for water based fluids.

| Product number | ID   |      | Dimension | OD   | T.H. | T.H. max | Max WP |      | Min BP |       | Min BR |       | Weight (approx) |       | Ferrule |
|----------------|------|------|-----------|------|------|----------|--------|------|--------|-------|--------|-------|-----------------|-------|---------|
|                | in   | mm   | dash size |      | mm   | mm       | bar    | psi  | bar    | psi   | mm     | inch  | kg/m            | lb/ft |         |
| T2E101K-04     | 1/4  | 6.4  | 04        | 12.4 | 24.8 | 26       | 250    | 3625 | 1120   | 16240 | 50     | 1.969 | 0.364           | 0.244 | 001C-04 |
| T2E101K-05     | 5/16 | 8.0  | 05        | 13.5 | 27.0 | 28.2     | 250    | 3625 | 1000   | 14500 | 55     | 2.165 | 0.420           | 0.282 | 001C-05 |
| T2E101K-06     | 3/8  | 9.5  | 06        | 15.6 | 31.2 | 32.6     | 250    | 3625 | 1000   | 14500 | 60     | 2.362 | 0.490           | 0.330 | 001C-06 |
| T2E101K-08     | 1/2  | 12.7 | 08        | 19   | 38   | 39.4     | 200    | 2900 | 800    | 11600 | 70     | 2.756 | 0.782           | 0.525 | 001C-08 |

A specific machine is available to split the twin hose . In case of order use code MHSXA001.



**Marking:** Available also white ink-jet brand version. In case of order use code T2E101KI.